

GDMR1-12

GDMR1-23, GDMF1-23

GDMRS2-48, GDMF2-48



FEATURES

Supreme Refrigeration merchandisers offer unsurpassed quality at an incredible value. Digitally controlled temperature is visible from outside of the stainless steel exterior.

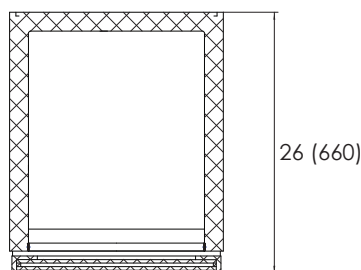
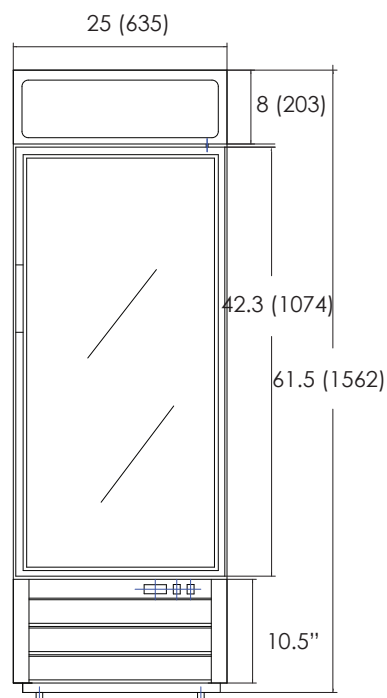
- Coated Steel Exterior and Interior
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- CFC free refrigerant and foam
- Self-closing door
- Magnetic gasket
- Double pane glass
- Powder coated cold rolled steel walls and cabinet, stainless steel floor
- LED lamps
- GDMR1-12, GDMR1-23, GDMF1-23, GDMRS2-48 in 120V/60Hz/1 Phase
- GDMF2-48 in 115/208-230/60/1 voltage.
(GDMF2-48 requires a 20 amp breaker, designated circuit.)



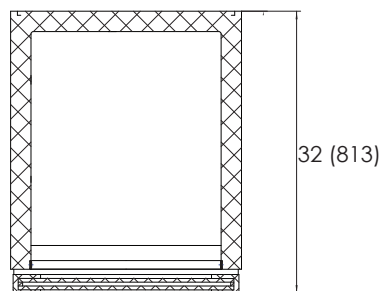
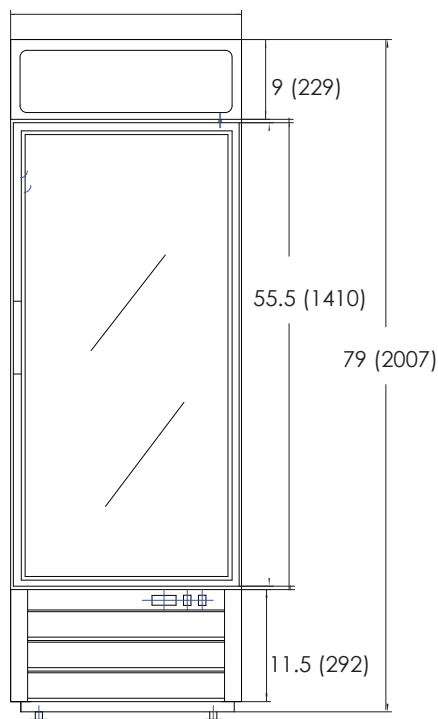
Specifications subject to change without notice.

Approvals: UL, UL sanitation

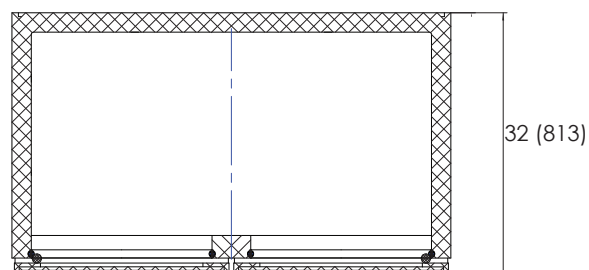
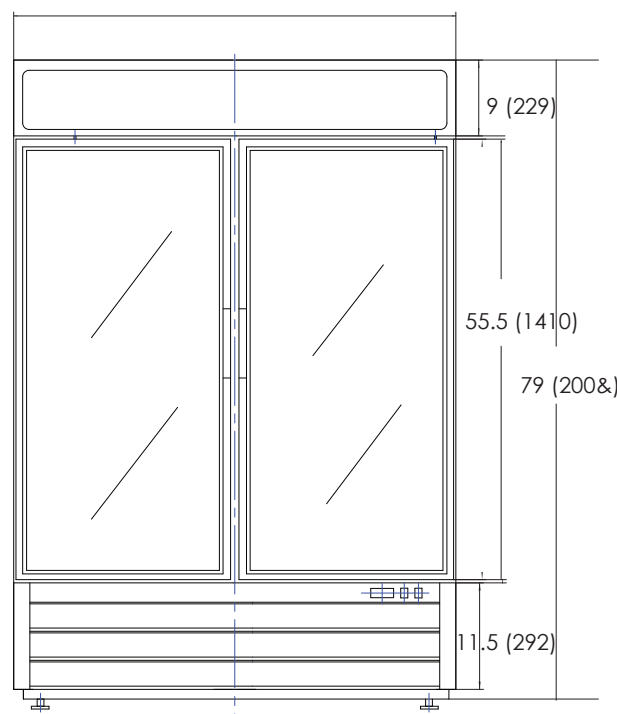
Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

GDMR1-12

GDMR1-23, GDMF1-23

27 (686)


GDMRS2-48, GDMF2-48

54 (1372)


SPECIFICATIONS

Model	Dim (W"xD"xH")	Capacity	Temp	Amps	Doors	Weight	Shelves
GDMR1-12 Refrigerator	25 x 26 x 61.8 635 x 660 x 1570 mm	12 Cu Ft 340 L	33° to 41°F .5° to 5°C	6	1 Hinged	221 lb 100 kg	3
GDMR1-23 Refrigerator	26.8 x 31.9 x 79.5 681 x 810 x 2019 mm	23 Cu Ft 651 L	33° to 41°F .5° to 5°C	6	1 Hinged	282 lb 128 kg	4
GDMF1-23 Freezer	26.8 x 31.9 x 79.5 681 x 810 x 2019 mm	23 Cu Ft 651 L	-10° to 10°F -23° to -12°C	11	1 Hinged	302 lb 137 kg	4
GDMRS2-48 Refrigerator	54 x 31.9 x 79.5 1372 x 810 x 2019 mm	48 Cu Ft 1359 L	33° to 41°F .5° to 5°C	7	2 Slide	448 lb 203 kg	8
GDMF2-48 Freezer	54 x 31.9 x 79.5 1372 x 810 x 2019 mm	48 Cu Ft 1359 L	-10° to 10°F -23° to -12°C	5	2 Hinged	477 lb 216 kg	8

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

02142017