

REFRIGERATORS/FREEZERS

RIR-1, RIF-1

RIR-2, RIF-2





FEATURES

Supreme Refrigeration reach-in refrigerators and freezers offer unsurpassed quality at an incredible value. Digitally controlled tempurature is visible from outside of the stainless steel exterior.

- Stainless steel exterior and painted aluminum interior
- ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and swivel casters come standard
- Utilizes environmentally friendly CFC-free refrigerant,
- Refrigerator R134A / Freezer R404A
- Automatic defrost system

- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature: Refrigerator: 33°F to 41°F, Freezer: -10°F to 10°F
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Recessed handles
- 120V/60Hz/1 Phase




Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



REFRIGERATORS/FREEZERS

RIR-1, RIF-1

RIR-2, RIF-2

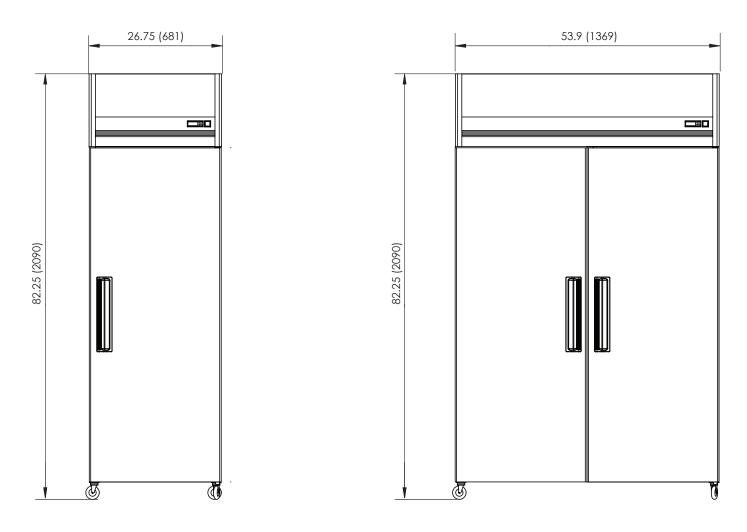

SPECIFICATIONS							
Model	Dim (W''xD''xH'')	Capacity	Temp	Amps	Doors	Weight	Shelves
RIR-1 Refrigerator	26.8 x 32.7 x 82.3 681 x 831 x 2090 mm	23 Cu Ft 651 L	33° to 41°F .5° to 5°C	6	1	282 lb 128 kg	3
RIF-1 Freezer	26.8 x 32.7 x 82.3 681 x 831 x 2090 mm	23 Cu Ft 651 L	-10° to 10° F -23° to -12° C	11	1	305 lb 138 kg	3
RIR-2 Refrigerator	53.9 x 32.7 x 82.3 1369 x 831 x 2090 mm	49 Cu Ft 1,387 L	33° to 41°F .5° to 5°C	9	2	457 lb 207 kg	6
RIF-2 Freezer	53.9 x 32.7 x 82.3 1369 x 831 x 2090 mm	49 Cu Ft 1,387 L	-10° to 10° F -23° to -12° C	5	2	468 lb 212 kg	6

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.